Glass·Boy GBX2

THE ALLROUNDER

VACUUM GLASS LIFTER

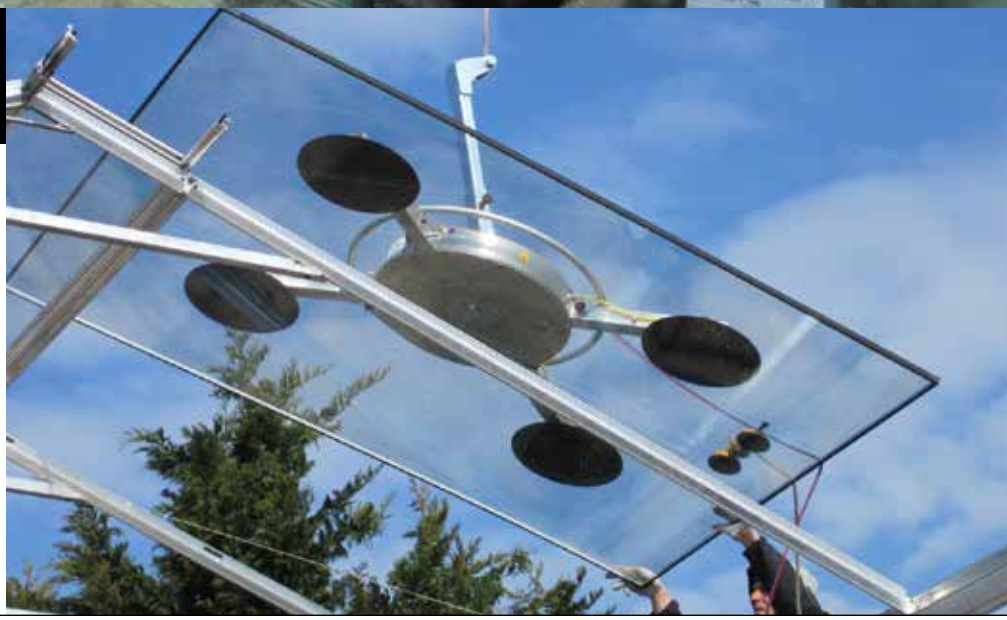

WWW.AUTOMAKASSEMBLY.COM

AutoMAK

AutoMAK Canada Inc

DUAL CIRCUIT

Glass·Boy GBX2

THE ALLROUNDER

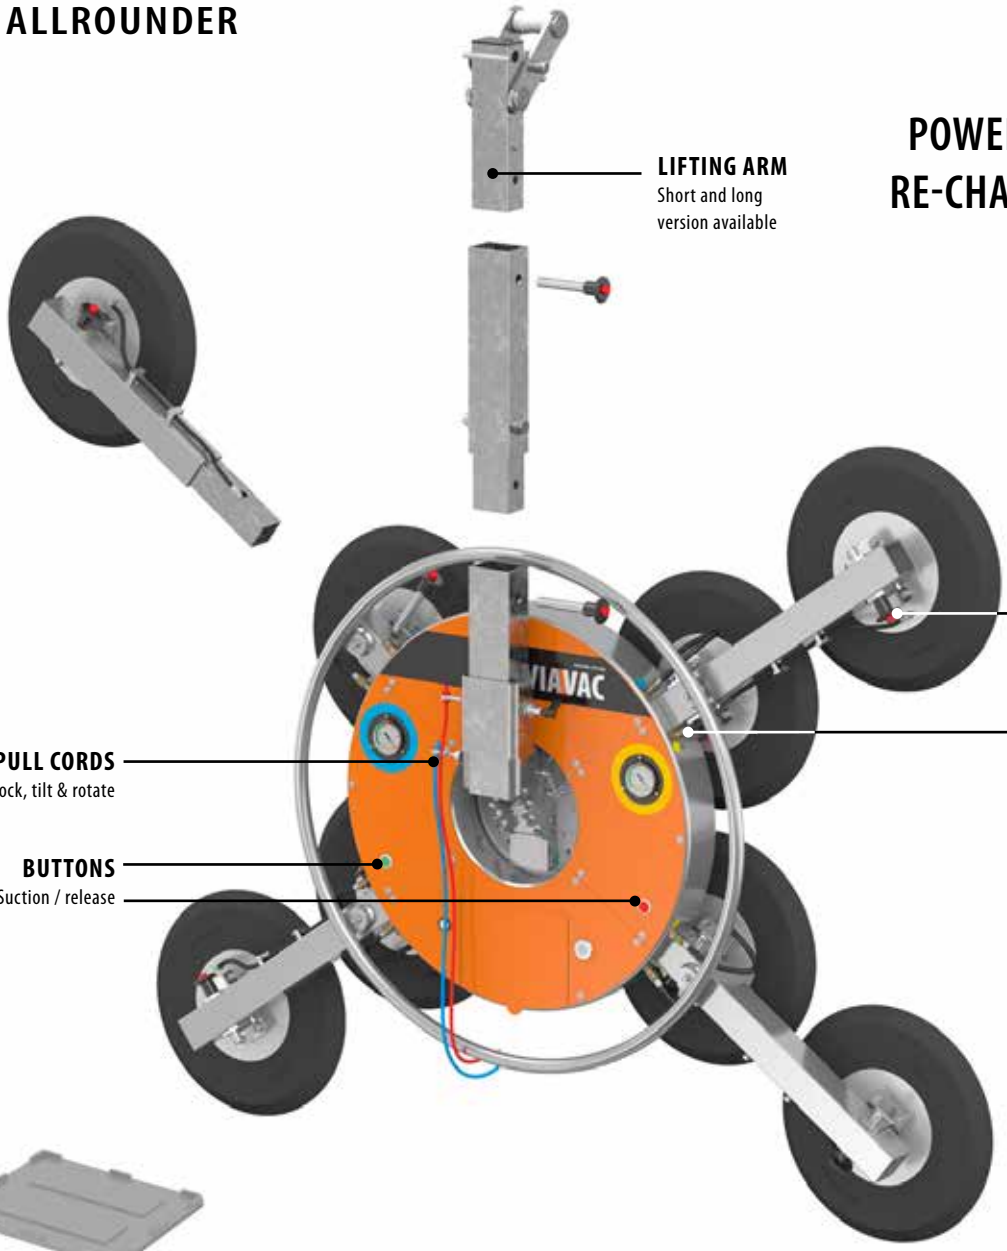

LIFTING ARM
Short and long version available

SECURING PIN

QUICK COUPLINGS
Connect vacuum hoses

PULL CORDS
Unlock, tilt & rotate

BUTTONS
Suction / release

POWERED BY INTERNAL RE-CHARGEABLE BATTERY

TRANSPORT BOX
Optional

RADIO REMOTE CONTROL
Optional

FEATURES

- 90° tilting mechanism with locking facility every 18°
- 360° rotation with locking facility in 12 positions
- Pull cords to unlock tilt and rotate facility
- Radio remote control for suction & release (optional)

SAFETY FEATURES

- 2 independent vacuum circuits, each with 2-fold safety margin
- Integrated vacuum gauges with red / green indication
- Audible and visible low vacuum warning
- Audible and visible low battery warning
- Vacuum buffer tanks with non return valves

SPECIFICATIONS

Configuration	4P-0E	6P-2E	8P-4E
• Lifting capacity	880lbs	1320lbs	1760lbs
• Machine weight	148lbs	192 lbs	220lbs

Complies with European standard EN 13155

4P-0E
880LBS



4P-2E
880LBS



4P-4E
880LBS

6P-2E
1320LBS



6P-4E
1320LBS



8P-4E
1760LBS



425 Admiral Blvd, Unit 2,
Mississauga, ON L5T 2N1
Canada

Phone : +1 905 283 4877

E-mail : infoca@automakassembly.com
Web : www.automakassembly.com

AutoMAK
AutoMAK Canada Inc